


Jacuzzi J-325


Specifications

Seating Capacity.....	4-5 Adults
Dimensions	84" x 76" x 33.50" (213.5 cm x 193 cm x 85.09 cm); For Complete Dimensions, See page 81
Dry Weight.....	619 lbs (281 kg)
Filled Weight (Spa Volume)	4,372 lbs (1,983 kg)
Filled Weight (Average Fill).....	3,413 lbs (1,548 kg)
Water Capacity (Spa Volume).....	450 US gallons (1,703 Liters)
Water Capacity (Average Fill).....	335 US gallons (1,268 Liters)
Electronic Controls	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1 (Convertible)	North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame
(3-Wire 240V)	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes, 8-hour
Heater (Convertible)	North America (60 Hz): 1 kW/4.0 kW Low Flow
(3-Wire 240V)	North America (60 Hz): 4.0 kW Low Flow
Export (50 Hz)	2.7 kW Low Flow
Total PowerPro® Jets.....	23
Seat A Jets	2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
Seat B Jets	1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large
Seat C Jets	4 PowerPro® FX, 2 PowerPro® FX Large Rotational
Seat C HYDROSOOTHE™ Jets	2 PowerPro® FX Directional with independent flow rate valve
Seat D Jets	2 PowerPro® FX Large Rotational
Footwell (E)	4 PowerPro® FX Small
Massage Selectors	1
Air Controls.....	4, On/Off rocker style
Water Management System.....	Two 60 ft² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay® UV-C System
LED Lighting	One underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and exterior light
ProFinish™ Cabinet Colors.....	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Waterfall	One independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:	North America (60 Hz): Convertible: 1kW/4kW; 3-Wire 240V 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A, North America (60 Hz): 3-Wire 240V@30A, 40A Export (50 Hz): 220-240 VAC@1x16A or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.
Warranty*.....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional).....	SmartTub® Module (Must order with the True™ Water Sytem)
Audio System (Optional).....	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

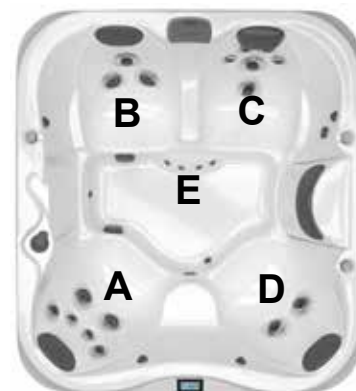

Jacuzzi J-325

Operation/Seat Depths

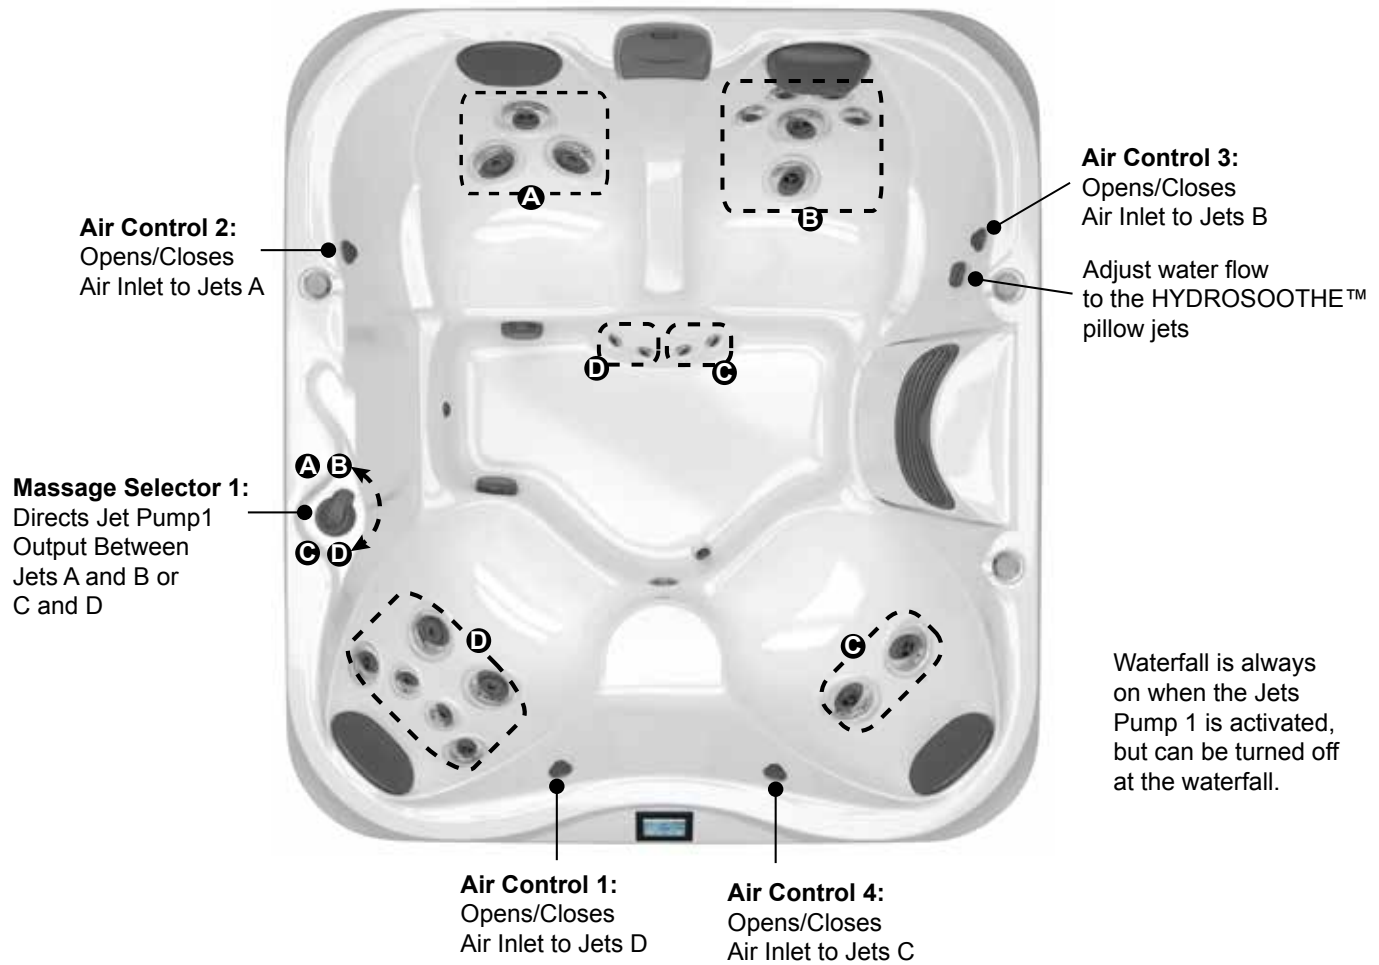

23 Total Jets




Spa Operation Subject to Change without Notice

Seat Depths

- A = 27.38" (69.5 cm)**
- B = 27.38" (69.5 cm)**
- C = 27.38" (69.5 cm)**
- D = 25.75" (65.4 cm)**
- E = 16.63" (42.2 cm)**
- F = 31.25" (79.4 cm)**


Listed dimensions represent
distance from top of acrylic
to lowest point in seat.
Tolerance $\pm 0.5"$ (1.27 cm).

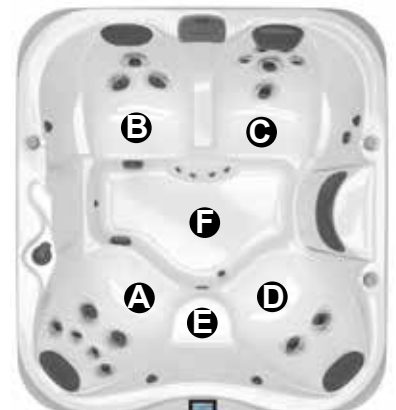


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-325

Dimensions

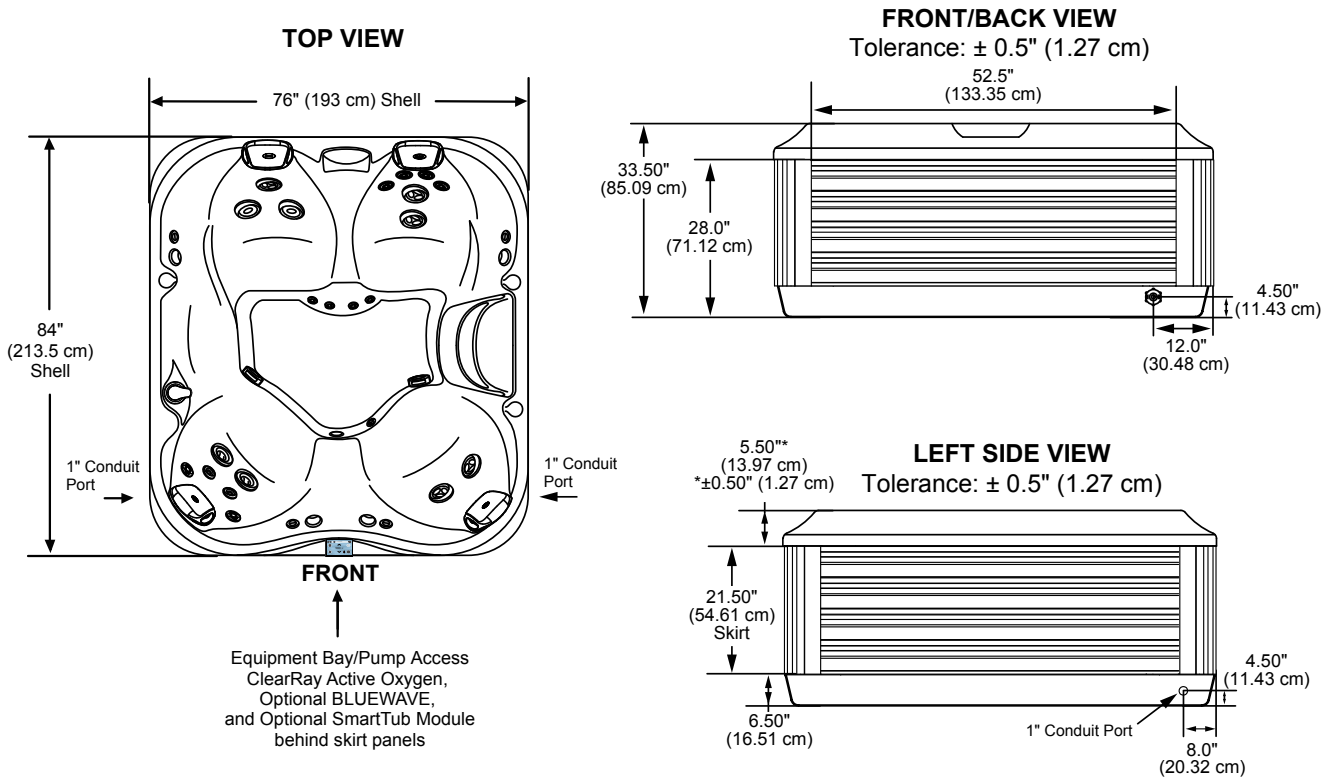


IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

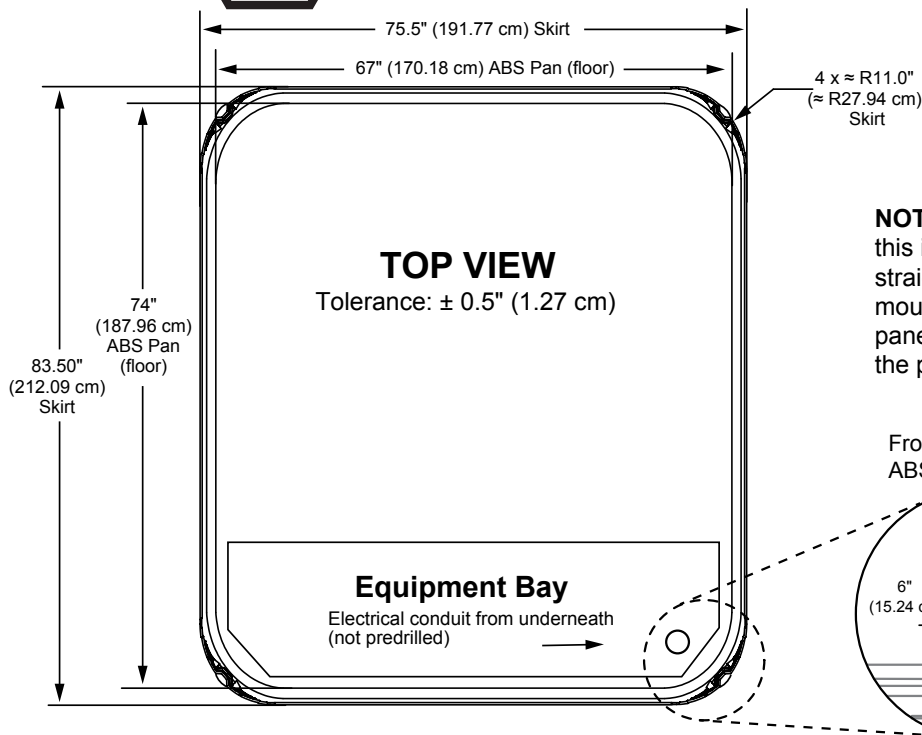

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the ABS pan



Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)