
## Jacuzzi J-365 Specifications

Seating Capacity	6-7 Adults
	84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm);
	For Complete Dimensions, See page 81
Dry Weight	805 lbs (365 kg)
Filled Weight (Spa Volume)	
Filled Weight (Average Fill)	4,099 lbs (1,859 kg)
Water Capacity (Spa Volume)	500 US gallons (1,893 Liters)
Water Capacity (Average Fill)	
Electronic Controls	Solid state electronic touchscreen controls,
	programmable temperature, filtration, and heat
Dump 1	cycles North America (60 Hz): 1-Speed, 4.8 HP brake,
	2.5 HP continuous, 56 Frame Shown with the optional
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump	
	North America (60 Hz): 5.5kW High Flow
Export (50 Hz)	2.7kW High Flow
Total PowerPro® Jets	46
	4 PowerPro® FX, 2 PowerPro® FX Large Rotational
Seat B Jets	
	2 PowerPro® NX2, 2 PowerPro® FX, 3 PowerPro® MX
Seat D Jets	
	10 PowerPro® FX, 2 PowerPro® FX Rotational 8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
Soat E HYDROSOOTHEM Lote	2 PowerPro® FX Directional with independent flow rate valve
	2 PowerPro® NX2, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX
	Large
Footwell (G)	8 PowerPro® FX Small, 1 PowerPro® FX
Massage Selectors	2
Air Controls	4, On/Off rocker style
Water Management System	Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1;
	Factory installed ClearRay Active Oxygen® System; <u>Optional</u> True™ Water System
	(Must order with SmartTub® option)
	ClearRay® UV-C System
LED Lighting	One underwater light with 4 color modes, one colored waterfall light, cup holders,
BroEinich™ Cabinat Colors	2 HYDROSOOTHE pillow lights, and exterior lights ModernHardwood,BrushedGray,andSmokedEbony
	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	
	One independent flow rate (on or off) adjustment; powered by the circulation pump
	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A
	Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated
	circuit breaker to comply with local electrical codes. Certain countries may
	require dual power inputs; two GFCI RCD Breakers are required for this
Warrantu*	configuration. North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing
	Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets,
	2 Years Lights, 1 Year Stereo;
	Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing
	Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet,
	2 Years Jets, 2 Years Lights, 2 Years Stereo
	SmartTub® Module (Must order with the True™ Water Sytem), 2 IR Therapy Lights
Audio System (Optional)	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers
	and subwoofer

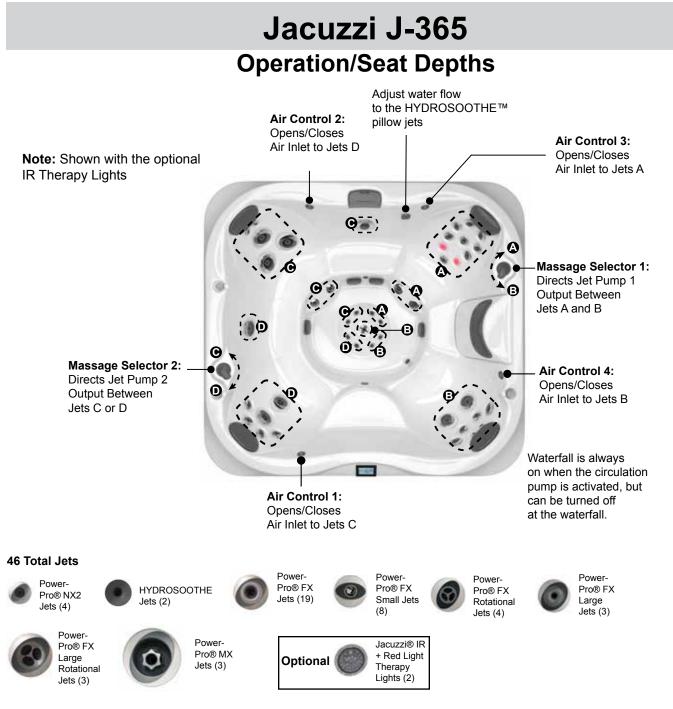

Spa Operation Subject to Change without Notice

## **Seat Depths**

A = 26.50" (67.47 cm)
B = 25.25" (64.14 cm)
C = 25.25" (64.14 cm)
D = 23.75" (60.33 cm)
E = 28.25" (71.76 cm)

)	F = 27.25" (69.22 cm)
)	G = 17.50" (44.45 cm)
)	H = 33.75" (85.73 cm)
)	
<b>`</b>	

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

## Jacuzzi J-365 Dimensions

## **TOP VIEW**

FRONT/BACK VIEW Tolerance: ± 0.5" (1.27 cm)

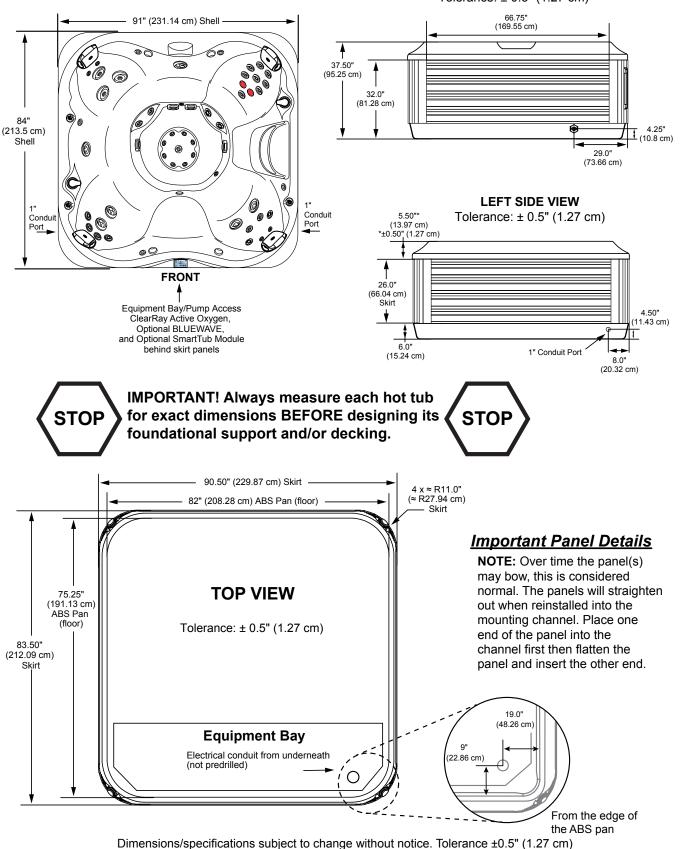

36