


Jacuzzi J408L™

Specifications

| | |
|-------------------------------------|---|
| Seating Capacity..... | 5-6 |
| Dimensions | 89" x 89" x 34" (227 cm x 227 cm x 87 cm); For complete dimensions, see page 74 |
| Dry Weight..... | 914 lbs (415 kg) |
| Filled Weight (Average Fill)..... | 3,625 lbs (1,645 kg) |
| Water Capacity (Average Fill)..... | 325 US gallons (1,231 Liters) |
| Electronic Controls | Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles |
| Pump 1..... | North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous |
| Pump 2..... | North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous |
| Circulation Pump..... | Yes, 8-hour |
| Total Jacuzzi® PowerPro® Jets | 39 (Plus 2 IR Therapy Lights) |
| Seat A Jets | 2 Jacuzzi® PowerPro® NX2, 2 Jacuzzi® PowerPro® RX, 2 Jacuzzi® PowerPro® FX Large Rotational, 2 Jacuzzi® PowerPro® FX Rotational, 6 Jacuzzi® PowerPro® FX |
| Seat B Jets | 4 Jacuzzi® PowerPro® RX |
| Seat C Jets | 2 Jacuzzi® PowerPro® NX2, 7 Jacuzzi® PowerPro® FX, 2 IR Therapy Lights |
| Seat D Jets | 2 Jacuzzi® PowerPro® FX Rotational |
| Seat E Jets | 2 Jacuzzi® PowerPro® FX Large Rotational, 2 Jacuzzi® PowerPro® MX, 2 Jacuzzi® PowerPro® FX |
| Seat F Jets..... | 2 Jacuzzi® PowerPro® NX2 |
| Footwell (G)..... | 2 Jacuzzi® PowerPro® MX |
| Massage Selector | 1 |
| Air Controls..... | 3, On/Off rocker switch air controller |
| Water Management System..... | One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; True Water® System Export (50 Hz):.....True Water® System |
| LED Lighting | Two underwater light with 4 color modes, waterfall lights, exterior corner lights |
| Cabinet | Modern Hardwood, Brushed Gray, Smoked Ebony |
| Acrylic Colors | Platinum, Porcelain |
| Headrests | 3 |
| Waterfalls | One; Independent flow rate (on or off) adjustment powered by Circulation Pump |
| Heater:..... | North America (60 Hz): 5.5 kW, High Flow Export (50 Hz):High Flow, 2.7 kW |
| Electrical Requirements: | North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration. |
| Warranty*..... | North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True Water® System; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True Water® System |
| Special Features (Standard)..... | SmartTub® Module Export (50 Hz) (Optional): .SmartTub® Module |
| Audio System (Optional)..... | N/A |

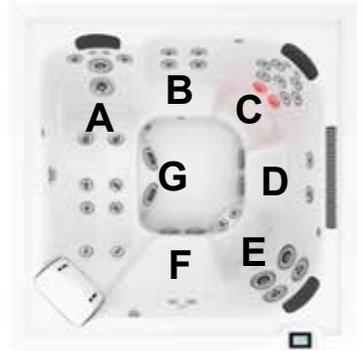


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J408L

Operation/Seat Depths

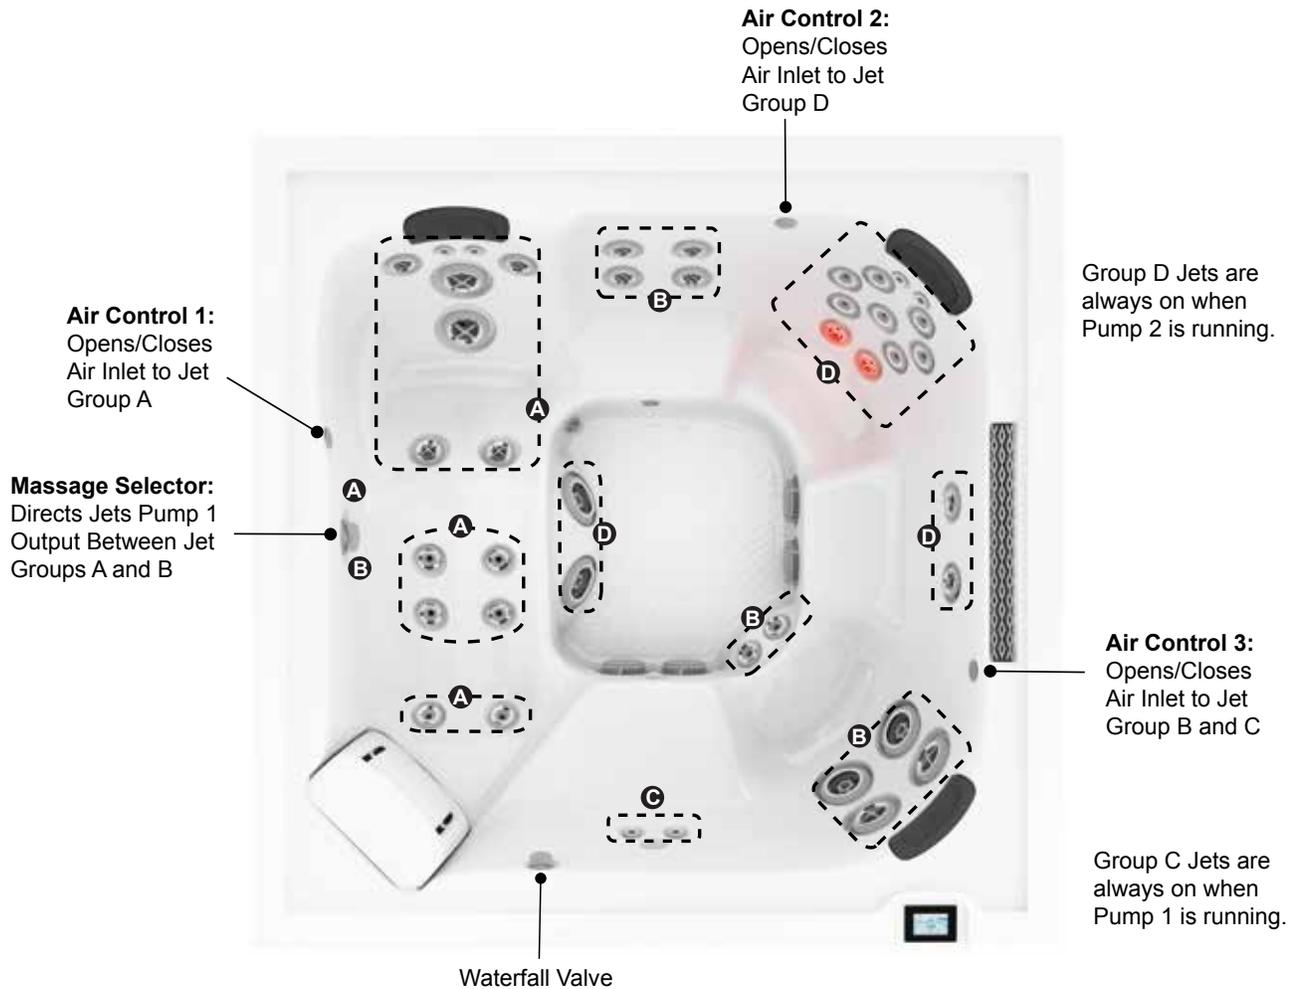

39 Total Jets (plus 2 IR Therapy Lights)




Spa Operation Subject to Change without Notice

Seat Depths

A = 25.00" (63.50 cm)
B = 22.00" (55.88 cm)
C = 27.00" (68.58 cm)
D = 20.88" (53.02 cm)
E = 26.25" (66.68 cm)

F = 18.38" (46.67 cm)
G = 24.25" (61.60 cm)
H = 31.00" (78.74 cm)

Listed dimensions
represent distance
from top of the deck
to lowest point in
seat. Tolerance $\pm 0.5"$
(1.27 cm).

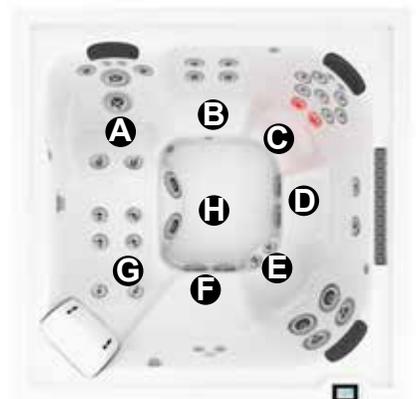


Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J408L

Dimensions


TOP VIEW

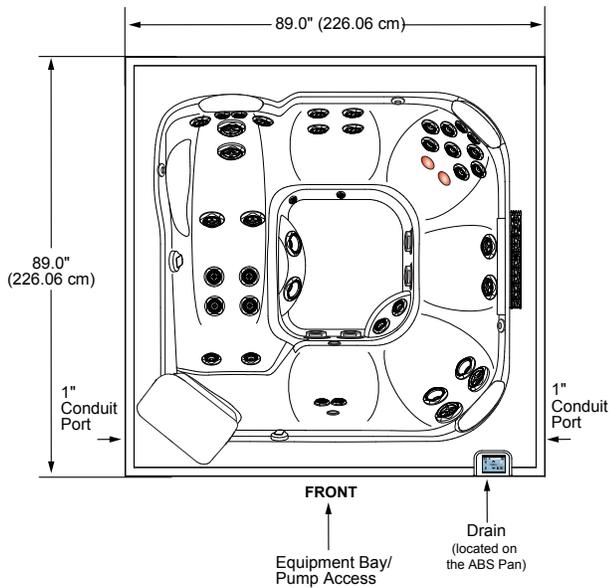


FRONT/BACK SIDE VIEW

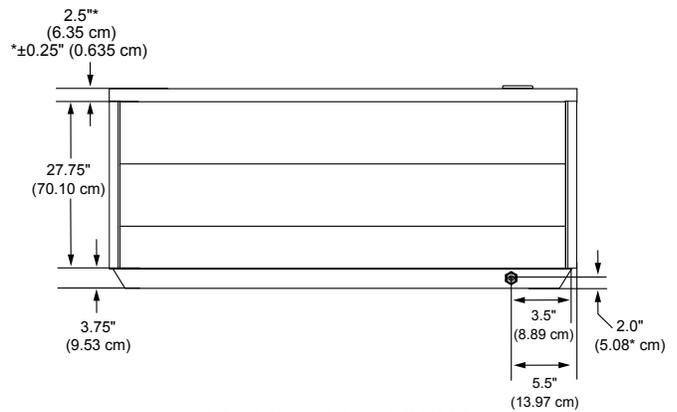

RIGHT SIDE VIEW

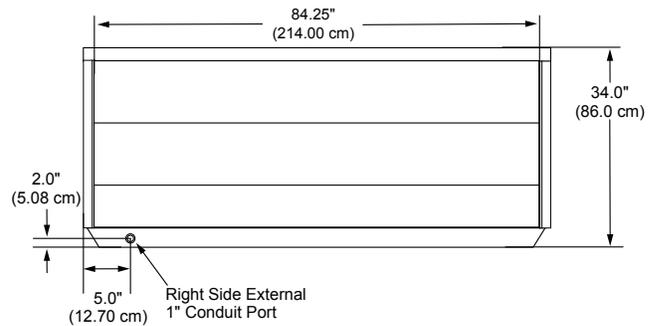

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

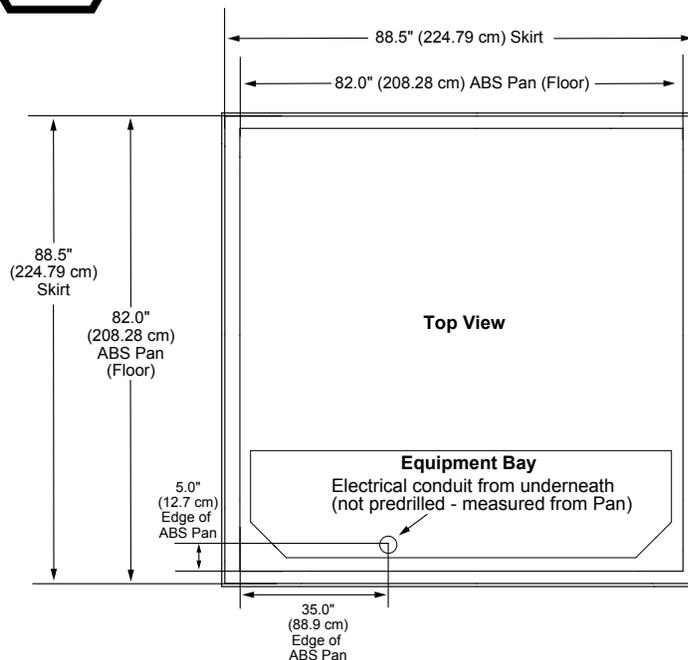

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)