Jacuzzi J404L™

Specifications

Seating Capacity.....3-4
Dimensions .....69" x 84" x 33" (176 cm x 214 cm x 84 cm);
For complete dimensions, see page 74
Dry Weight.....690 lbs (313 kg)
Filled Weight (Average Fill).....2,692 lbs (1,222 kg)
Water Capacity (Average Fill) .....240 US gallons (909 Liters)
Electronic Controls .....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles.
Pump 1.....North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz): .....1-Speed, 2.0 HP continuous
Pump 2.....N/A
Export (50 Hz): .....N/A
Circulation Pump.....Yes, 8-hour
Total Jacuzzi® PowerPro® Jets .....32 (Plus 2 IR Therapy Lights)
Seat A Jets .....2 Jacuzzi® PowerPro® NX2, 9 Jacuzzi® PowerPro® FX, 2 IR Therapy Lights, 2 Jacuzzi® PowerPro® FX Rotational, 4 Jacuzzi® PowerPro® FX
Seat B Jets .....1 Jacuzzi® PowerPro® FX Large
Seat C Jets .....2 Jacuzzi® PowerPro® NX2, 2 Jacuzzi® PowerPro® RX, 2 Jacuzzi® PowerPro® FX Rotational, 4 Jacuzzi® PowerPro® FX, 2 Jacuzzi® PowerPro® FX
Seat D Jets .....2 Jacuzzi® PowerPro® NX2
Massage Selector 1
Air Controls.....2, On/Off rocker switch air controller
Water Management System.....One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; True Water® System
Export (50 Hz): .....True Water® System
LED Lighting .....Two underwater light with 4 color modes, waterfall lights, exterior corner lights
Cabinet .....Modern Hardwood, Brushed Gray, Smoked Ebony
Acrylic Colors .....Platinum, Porcelain
Headrests 2
Waterfalls .....One; Independent flow rate (on or off) adjustment powered by Circulation Pump
Heater:.....North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz): .....High Flow, 2.7 kW
Electrical Requirements: .....North America (60 Hz): 240 VAC@40A or 50A
Export (50 Hz): 220-240 VAC@1x16A, 1x25A, or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True Water® System;
Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True Water® System
Special Feature (Standard).....SmartTub® Module
Export (50 Hz) (Optional): ..SmartTub® Module
Audio System (Optional).....N/A

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J404L

Operation/Seat Depths

Air Control 1:
Opens/Closes
Air Inlet to Jet
Group A

Massage Selector:
Directs Jets Pump 1
Output Between Jet
Groups A and B

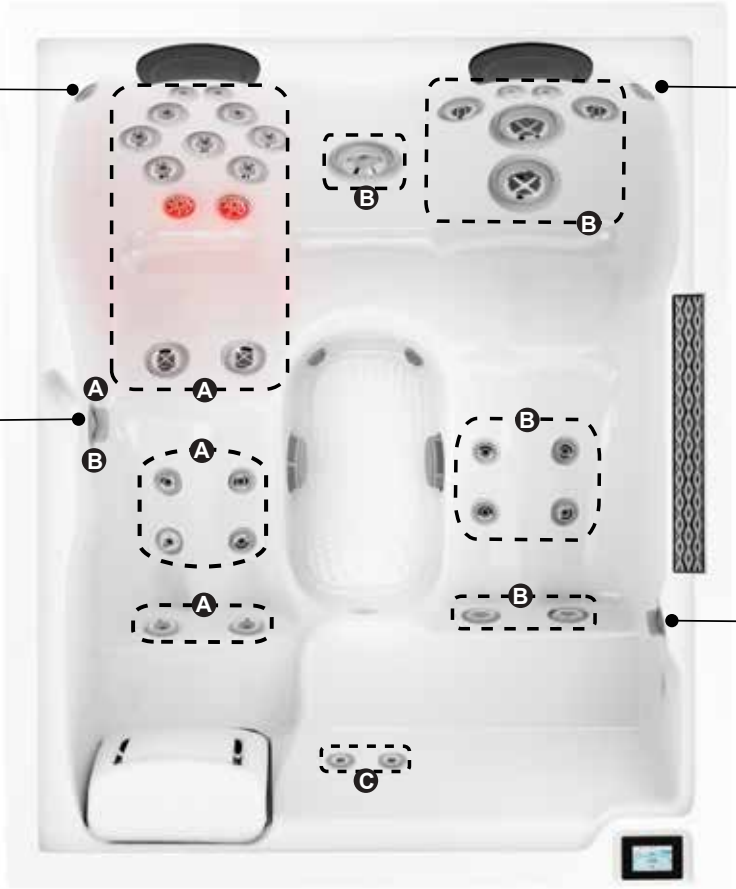

Air Control 2:
Opens/Closes
Air Inlet to Jet
Group B and C

Waterfall Valve

Group C Jets are
always on when
Pump 1 is running.

32 Total Jets (plus 2 IR Therapy Lights)

Jacuzzi® PowerPro® NX Jets (6)

Jacuzzi® PowerPro® RX Jets (2)

Jacuzzi® PowerPro® FX Mini Jets (8)

Jacuzzi® PowerPro® FX Jets (11)

Jacuzzi® PowerPro® FX Rotational Jets (2)

Jacuzzi® PowerPro® FX Large Jets (1)

Jacuzzi® PowerPro® FX Large Rotational Jets (2)

Jacuzzi® IR + Red Light Therapy Lights (2)

Spa Operation Subject to Change without Notice

Seat Depths

A = 26.75" (67.95 cm)
B = 24.00" (60.96 cm)
C = 24.75" (62.87 cm)
D = 25.50" (64.77 cm)
E = 16.50" (41.91 cm)
F = 28.50" (72.39 cm)

Listed dimensions represent distance from top of the deck to lowest point in seat. Tolerance ± 0.5" (1.27 cm).

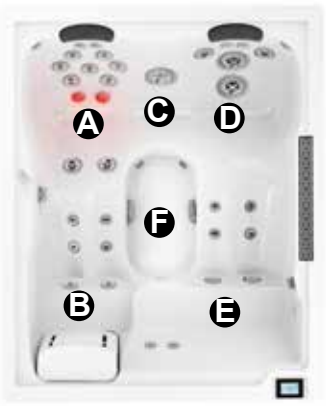

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J404L

Dimensions

TOP VIEW

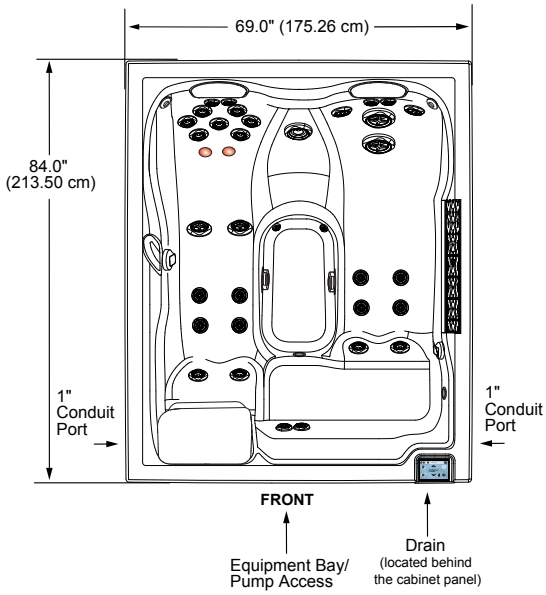

FRONT/BACK SIDE VIEW

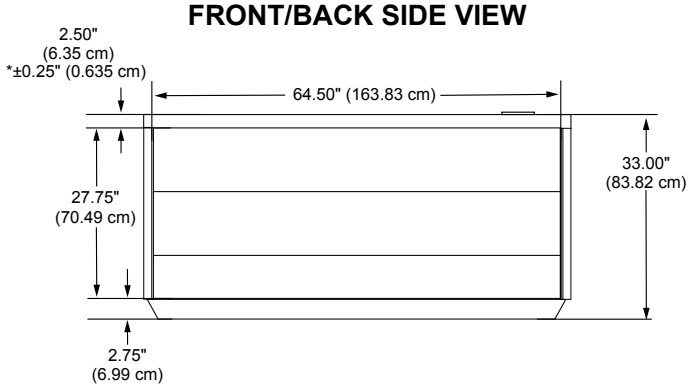

RIGHT SIDE VIEW

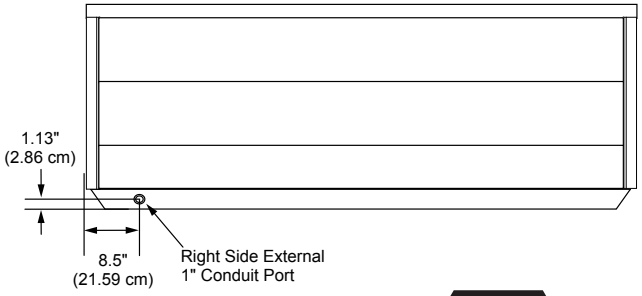

STOP

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

STOP

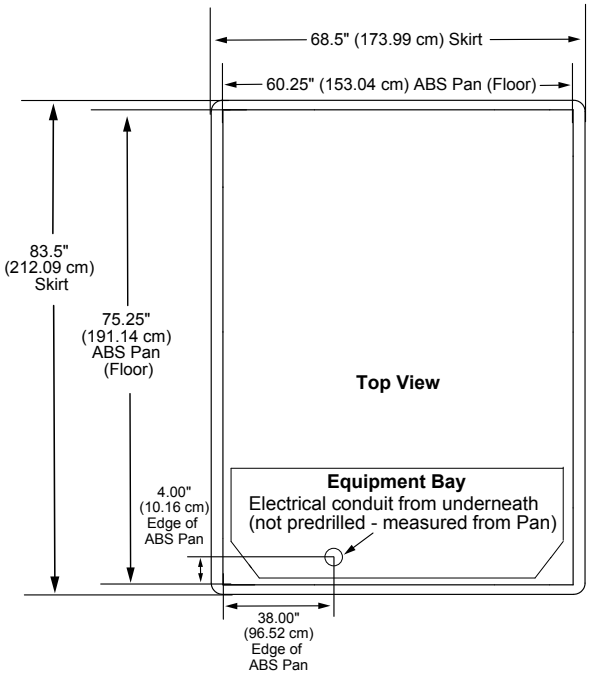

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)